


## FA Series

**FA Series** power supply were specially developed for connecting strobe lights and include versions with capacity to feed up to 6 strobe lamps, with output power from 35W to 70W. Circuits have been designed and manufactured with the latest technology, providing high efficiency and durability. FA Series are water resistant. For use in motorcycles.

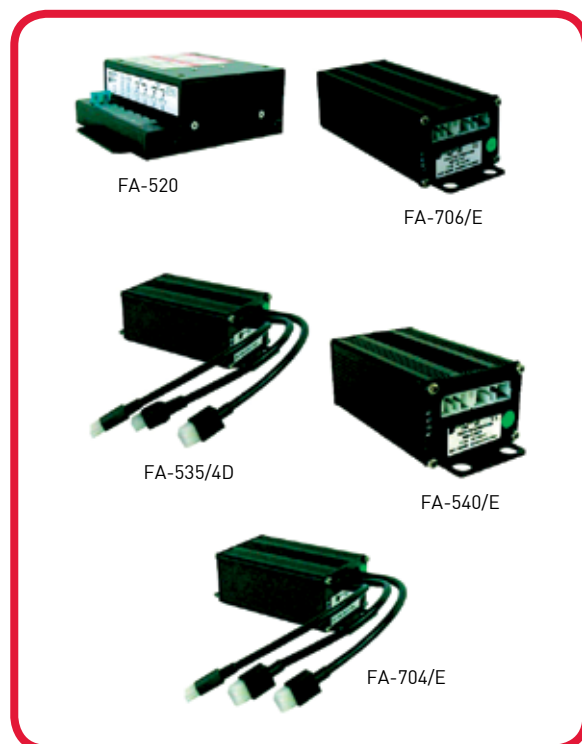

	FA-540/E	FA-540/E HL	FA-535/4D	FA-520	FA-520/M	FA-704/E	FA-706/E
POWER	35W	35W	35W	50W	50W	70W	70W
VOLTAGE	BITENSION	BITENSION	BITENSION	BITENSION	BITENSION	BITENSION	BITENSION
CONSUMPTION	3,5A to 12V 1,7A to 24V	3,5A to 12V 1,7A to 24V	3,5A	6A to 12V 3A to 24V	6A to 12V 3A to 24V	6,8A to 12V 3,3A to 24V	6,8A to 12V 3,3A to 24V
CHANNELS/ OUTPUTS	4	2	3	4	3	4	6
LOW INTENSITY	NO	NO	NO	YES	YES	YES	YES
LAMP FAILURE	NO	NO	NO	NO	NO	NO	NO

REF.	MOD.	DESCRIPTION
2004071	FA-540/E	35W Power supply, 2-Channels, (4) outputs, quad flash, splash-proof, bitension
2004080	FA-540/E HL	35W Power supply, 1-Channel, (2) outputs, simultaneous flash, splash-proof, bitension. German K Standard
2004067	FA-535/4D	35W Power supply, 2-Channels, (4) outputs, quad flash, splash-proof, 12V
2004038	FA-520	50W Power supply, 2-Channels, (4) outputs, double or quad flash, bitension
2004039	FA-520/M	50W, Power supply, 2-Channels, (3 outputs), double or quad flash, bitension
2004087	FA-704/E	70W Power supply, 2-Channels, (4) outputs, quad flash, splash-proof, bitension. UN R65 approved
2004089	FA-706/E	70W Power supply, 2-Channels, (6) outputs, quad flash, splash-proof, bitension. UN R65 approved

### Mount Accesories

8232010	SOP-FA520	Support w/ clip mount, FA520
8232445	KT/BLOK-FA/AS	Silent block kit, FA-535/4D, FA-706/E, FA-540/E, FA-540/E HL, FA-706 and AS-350
8244697	KT/CBL-FA	Wiring kit for FA-535/4D w/ CD-200/4